

# GMLL Series LED Machine Light

## Technical Data Sheet



### Specification:


Enclosure	Borosilicate glass 4.2mm Thick
LED Colour Temperature	6500 K, CRI>80
Input Voltage	24 VDC with Polarity & 240 VAC with External Adapter
Protection Grade	IP67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temp	-20 °C to +65 °C
Mounting	"L" Bracket with 180 Degree rotation freedom
Installation	Fixed by screws M5/M6

2 Core wire, 0.5 Sq. mm, 2 Mtr Lengths,  
RED- Positive, BLACK - Negative

**Note:** Light also available with Lens 40 degree


### Accessories:

Adapter 230 V AC to 24 VDC

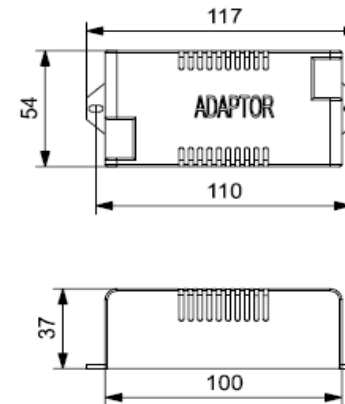

# GMLL Series LED Machine Light

## Technical Data Sheet

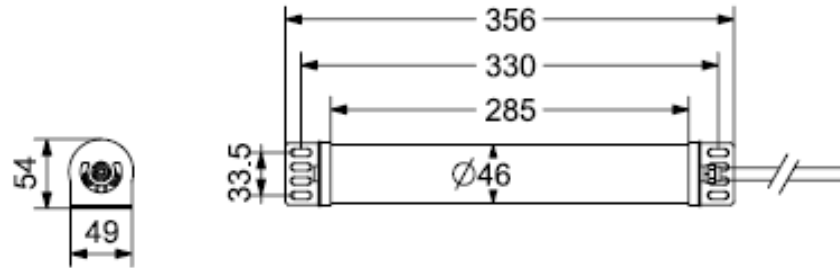


9 Watt 24 VDC

P/N: CR-GMLL-24-D-9W


12 Watt 24 VDC

P/N: CR-GMLL-24-D-12W

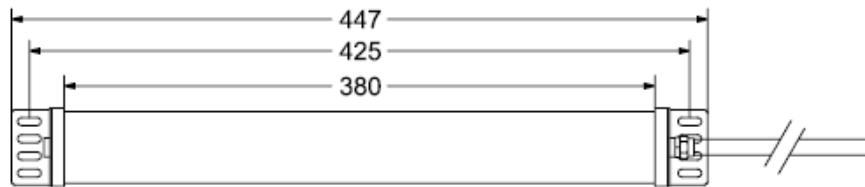

18Watt 24 VDC

P/N: CR-GMLL-24-D-18W

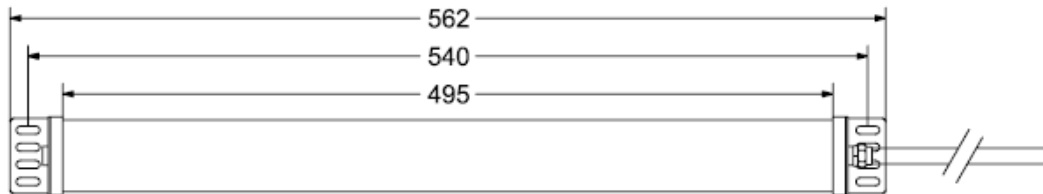

24Watt 24 VDC

P/N: CR-GMLL-24-D-24W