

# Ultra Slim LED Light

## Features

- Slim LED Light for Electrical Panel Industry, Machinery
- Diffused Cool White Light for Strain less Working
- Suitable for Ceiling Mounting and Wall Mounting
- Sleek & Compact Design
- Longer Life of 50000 Hrs
- Quick and Easy to Install
- Available with Clamp, and Magnet Mounting




## Specifications

<u>Operating Voltage</u>	<u>P/N</u>	<u>Dimension mm / inch (L x W x H)</u>
5 Watt, DC 24 V	CR-USL-D-24-5W	300 x 32 x 7 / 11.81" x 1.25" x 0.27"
10 Watt, DC 24 V	CR-USL-D-24-10W	600 x 32 x 7 / 18.75" x 1.25" x 0.27"
15 Watt, DC 24 V	CR-USL-D-24-15W	900 x 32 x 7 / 35.43" x 1.25" x 0.27"
20 Watt, DC 24 V	CR-USL-D-24-20W	1200 x 32 x 7 / 47.24" x 1.25" x 0.27"

## Technical Data

LED type	SMD2835, LM80 approved
Colour Temp (CCT)	6500 K
Luminous Efficiency	100lm/watt
Beam Angle	120 Deg
CRI (min)	80
Storage Temperature	-20 <sup>o</sup> C to + 75 <sup>o</sup> C
Operating Temperature	-10 <sup>o</sup> C to + 65 <sup>o</sup> C
Protection class	IP 20
Service Life	50,000 Hrs @ 25 <sup>o</sup> C
Accessories	2 no's Clamps for Clamp mounting, 0.5 Sq.mm 2 core Wire for Input Supply
Housing Material	PC + Aluminium

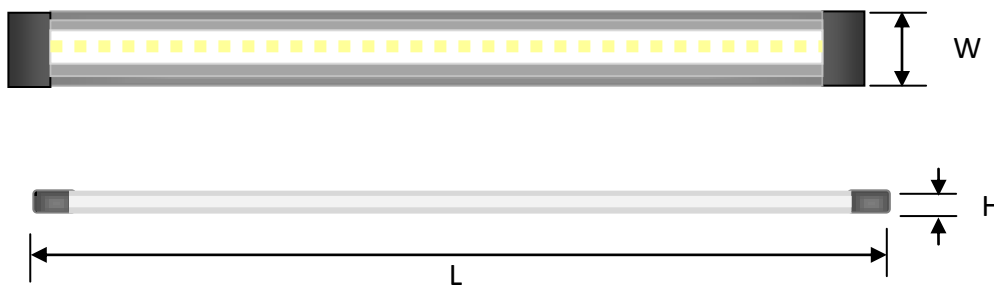


Steel Mounting Clamps


Information in the datasheet is subject to modification without prior notice

Craftech, 254, II floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad, Nashik – 422010, INDIA

# Ultra Slim LED Light

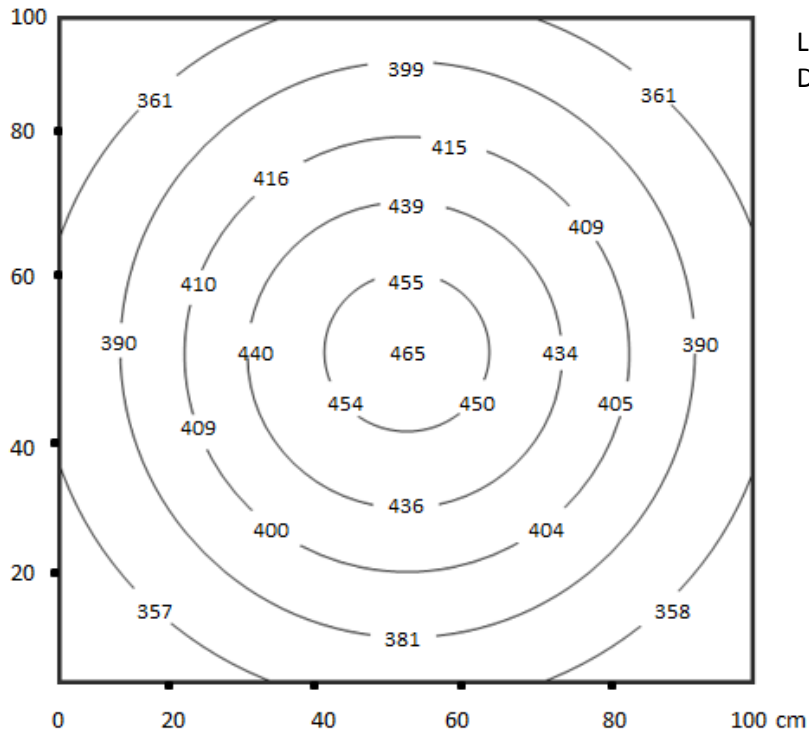

Lux diagram for 5W, 24 VDC, Transparent Diffuser, measured at 1 Mtr Height

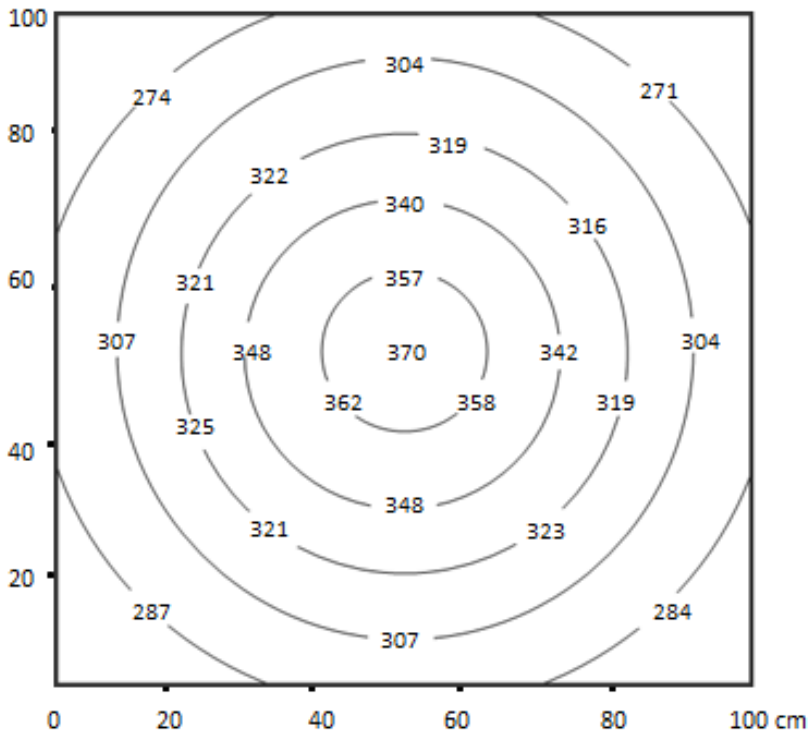

Lux diagram for 5W, 24 VDC, Milky White Diffuser, measured at 1 Mtr Height

Information in the datasheet is subject to modification without prior notice

Craftech, 254, II floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad, Nashik – 422010, INDIA