GMLL Series LED Machine Light

CE

Image only for representative purpose

The LED light is available in standard version and can be customized to size and wattage as per customer for specific application requirement

2 Core wire, 0.5 Sq. mm, 2 Mtr Lengths,

RED- Positive, BLACK- Negative

Note: Light also available with Lens 40 degree

Accessories:

Adapter 230 VAC to 24 VDC
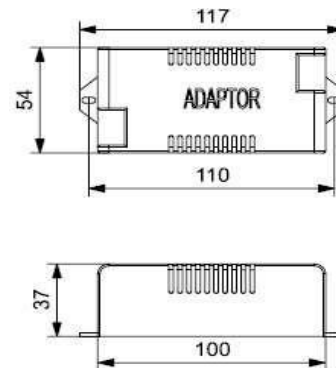
Specification

Enclosure	Borosilicate Glass 4.2mm Thick
LED Colour Temperature	6500 K, CRI > 80
Input Voltage	24 VDC with Polarity & 240 VAC with External Adapter
Protection Grade	IP67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temperature	-20^0C to $+65^0$C
Mounting	L Bracket with 180 Degree Rotation Freedom
Installation	Fixed by screws M5/M6

117

54

ADAPTOR

110

37

100

Craftech, 264, I floor, Mulay I Square,
Opp. Siemens, MIDC, Ambad,
Nashik-422010, INDIA

Email: info@craftech.co.in
www.craftech.co.in

craftech ™
Enhancing Business Performance

Ø51

65.5

350

330

285

33.7

Ø46

Ø6 TYP

9 & 12 Watt 24 VDC

P/N: CR-GMLL-24-D-9W

P/N: CR-GMLL-24-D-12W

445

425

380

33.7

Ø46

Ø6 TYP
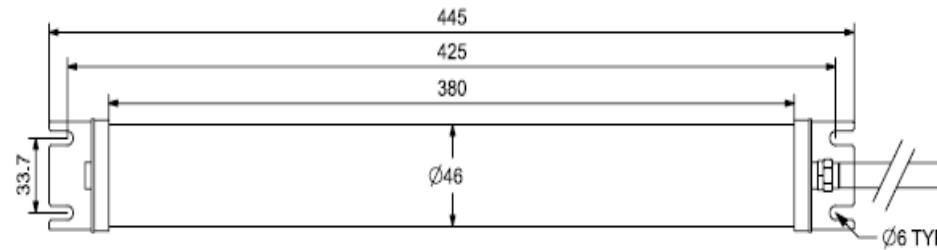
18 Watt 24 VDC

P/N: CR-GMLL-24-D-18W

560

540

495

33.7

Ø46

Ø6 TYP
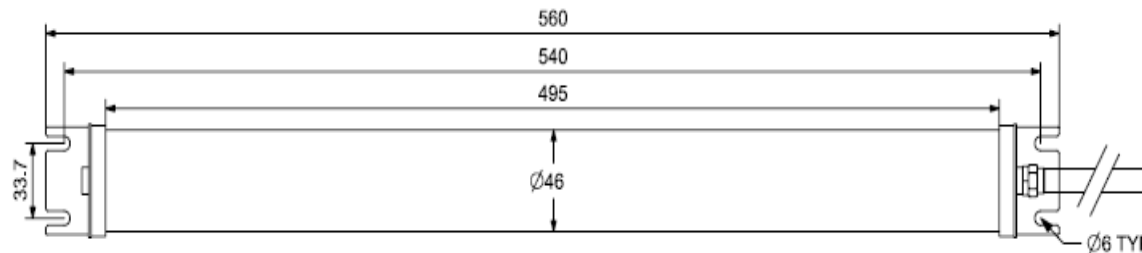
24 Watt 24 VDC

P/N: CR-GMLL-24-D-24W

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,
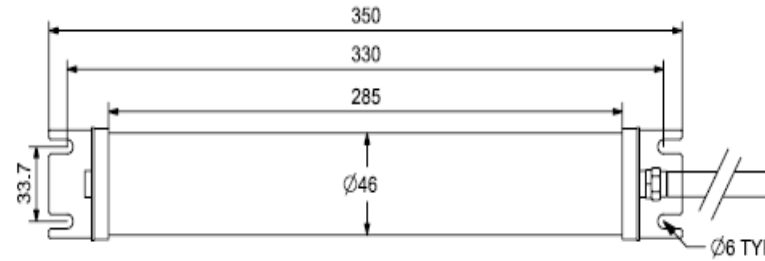Opp. Siemens, MIDC, Ambad,
Nashik-422010, INDIA

Email: info@craftech.co.in
www.craftech.co.in

craftech ™
Enhancing Business Performance