



2 core wire, 0.5 Sq.mm, 2 mtr Lengths,  
RED- Positive, BLACK- Negative

### Accessories:

#### Mounting Bracket


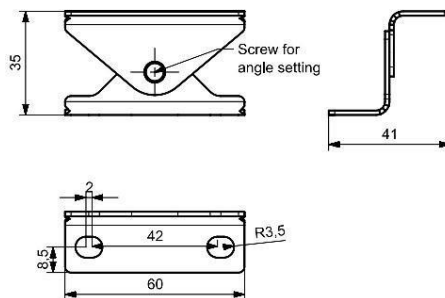


Image with Light Bracket, can also be installed without angle setting bracket.

### Technical Specification:

Housing Material	Anodized Aluminium 6063
Light Diffuser	4 mm Clear / Frosted Glass
LED Colour Temperature	6500 K
Light Beam Angle & CRI	40° LED Lens, CRI > 80
Power Consumption	7 W
Input Voltage	24 VDC with Polarity & 240 VAC with External Adapter
Rated Current	300 mA
Lumens Output	1200 lm at 1 mtr. Height +/- 5%
Protection Grade	IP67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temperature	-20 °C to +65 °C
Installation	Fixed by screws M5/M6 X 30mm

#### Adapter 230 VAC to 24 VDC

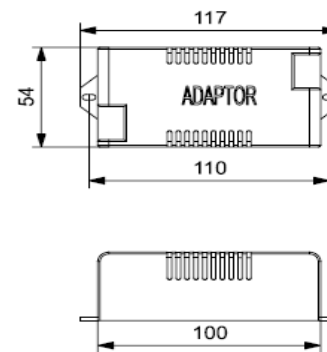

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad,  
Nashik – 422010, INDIA


Email: [info@craftech.co.in](mailto:info@craftech.co.in)  
[www.craftech.co.in](http://www.craftech.co.in)

# SMLL Series LED Machine Light


## Technical Data Sheet

IP67


Version 1, Date:27/2/2022

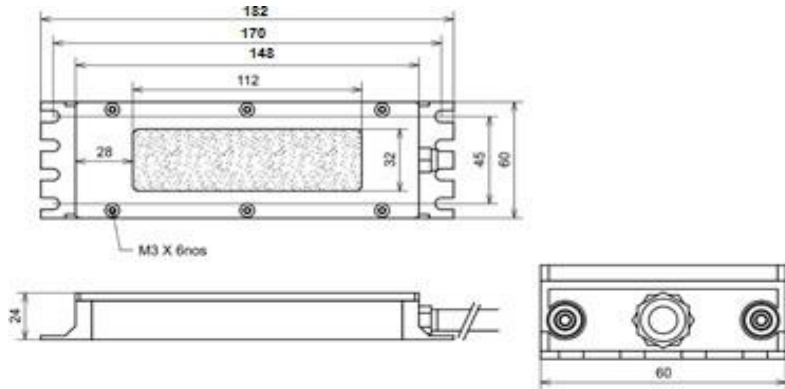

7 Watt 24 VDC  
P/N: CR-SMLL-24-D-7W

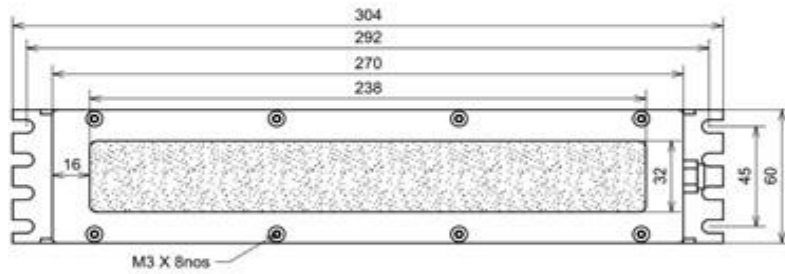

14 Watt 24 VDC  
P/N: CR-SMLL-24-D-14W

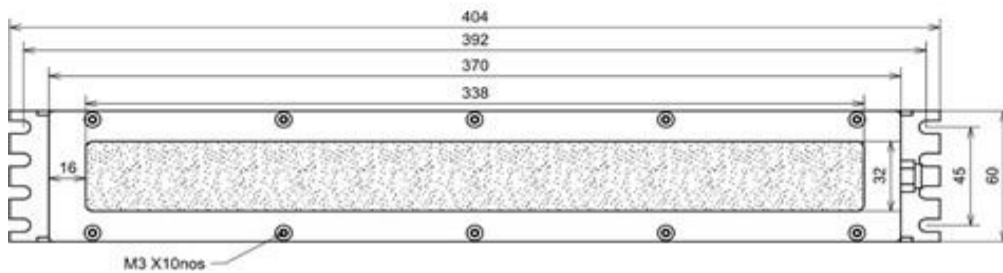

21 Watt 24 VDC  
P/N: CR-SMLL-24-D-21W

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad,  
Nashik – 422010, INDIA

Email: [info@craftech.co.in](mailto:info@craftech.co.in)  
[www.craftech.co.in](http://www.craftech.co.in)