

RMLL Series LED Machine Light



Technical Data Sheet

Version 1, Date: 08/05/2022



Craftech LED Machine Lights are compact, robust and efficient. It provides bright and uniform light distribution improving productivity and safety in operations. It is suitable for light as well as heavy industrial applications. It is constructed with heavy duty extruded aluminium and tempered glass with frosted surface finish to minimize glare on eyes. With estimated working life of 50,000 hrs., that will provide 5 years of maintenance free operation.

Specification

Light Diffuser	5 mm Clear/ Frosted Glass
Housing Material	Anodized Aluminium Housing 6063 Grade
Mounting Arrangement	"L" Clamp, Rotatable Mounting
LED Type	LM 80 Approved, OSRAM 0.5W LED
LED Light Angle, Color, CRI	120 Deg, 6500K, >80
Luminaire Light Yield	110-120 Lumens/ Watt
Insulation Resistance at 500 VDC	1.3 x 10 ⁴ Mega Ohm
Operating Temperature	-20°C to +65°C
Operating Life	50,000 Hrs.
Standard Conformity, Degree of Protection	IEC 60947, IEC 60529, IEC 60068, IP67


Image only for representative purpose

The LED light is available in standard version and can be customized to size and wattage as per customer for specific application requirement.

Note: Light also available with Lens 40 degree

Accessories:

Adapter 230 VAC to 24 VDC

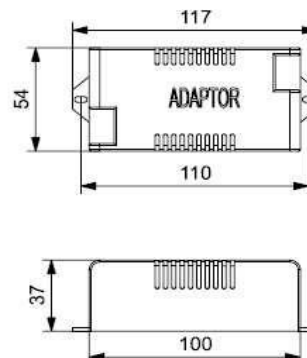

Information in the datasheet is subject to modification without prior notice

Craftech, 264, 1 floor, Mulay I Square,
Opp. Siemens, MIDC, Ambad,
Nashik-422010, INDIA

Email: info@craftech.co.in
www.craftech.co.in




RMLL Series LED Machine Light



Technical Data Sheet

Version 1, Date: 08/05/2022

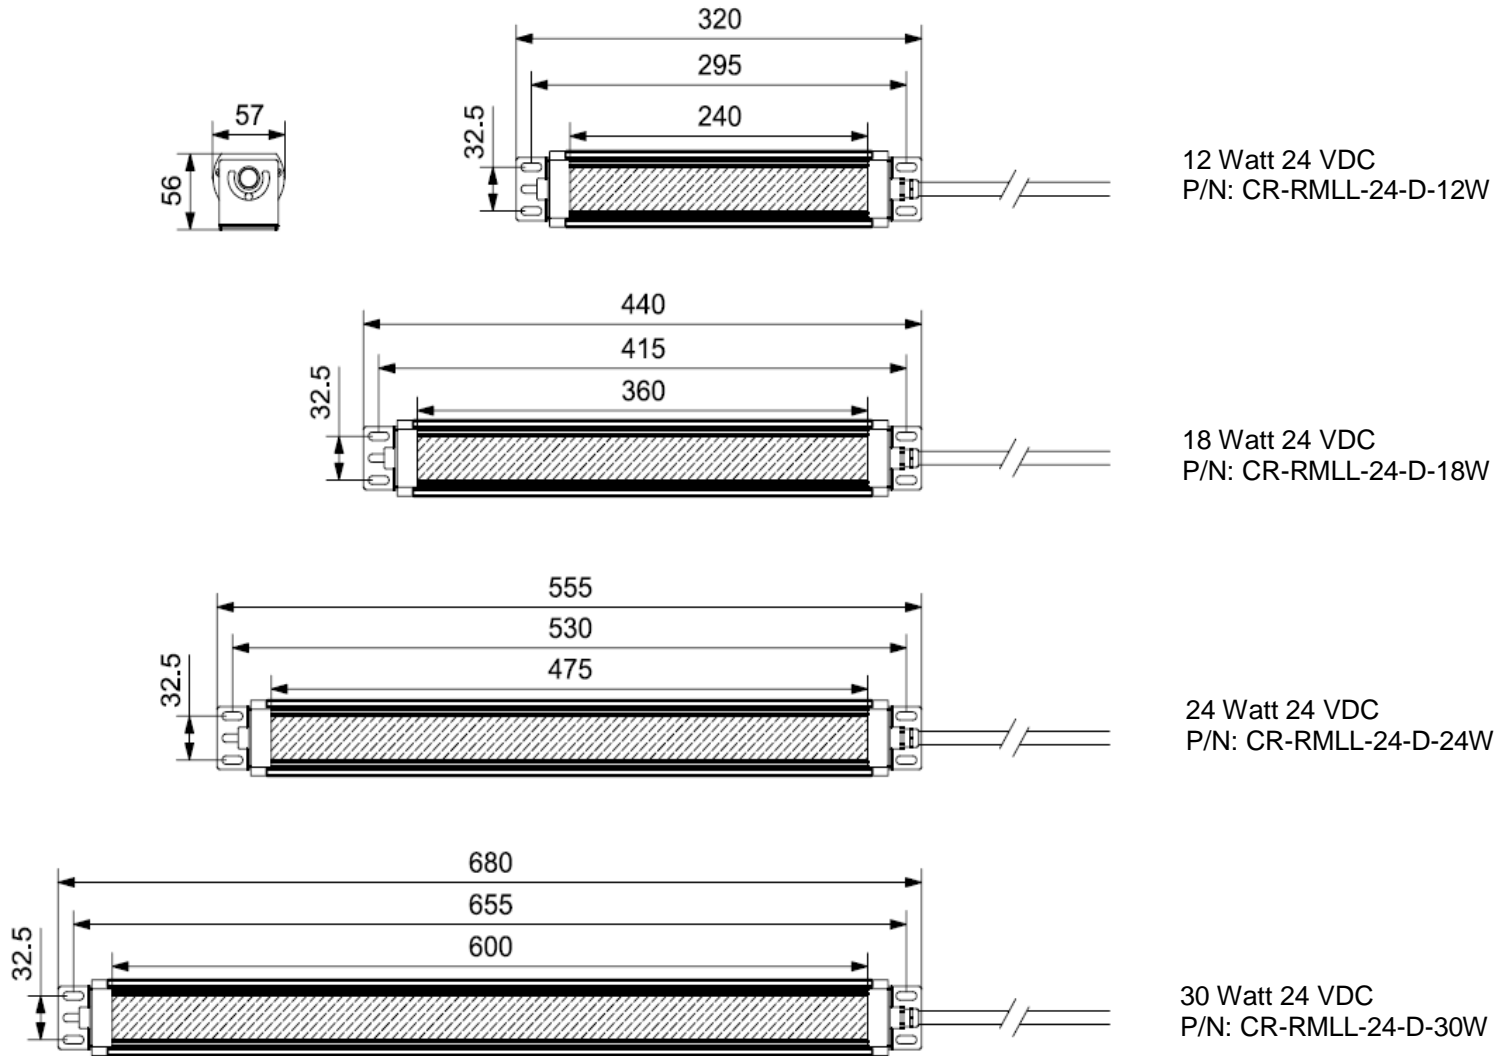

Information in the datasheet is subject to modification without prior notice

Craftech, 264, 1 floor, Mulay I Square,
Opp. Siemens, MIDC, Ambad,
Nashik-422010, INDIA

Email: info@craftech.co.in
www.craftech.co.in

