

### Features

- Slim LED Light for Electrical Panel Industry, Machinery
- Diffused Cool White Light for Strain less Working
- Suitable for Ceiling Mounting and Wall Mounting
- Sleek & Compact Design
- Longer Life of 50,000 Hrs.
- Quick and Easy to Install
- Available with Clamp, and Magnet Mounting




Image only for representation purpose

### Specifications

Operating Voltage	P/N	Dimension mm / inch (L x W x H)
5 Watt, DC 24 V	CR-USLL-24-D-5W	300 x 32 x 7 / 11.81" x 1.25" x 0.27"
7 Watt, DC 24 V	CR-USLL-24-D-7W	515 x 32 x 7 / 20.27" x 1.25" x 0.27"
10 Watt, DC 24 V	CR-USLL-24-D-10W	600 x 32 x 7 / 23.62" x 1.25" x 0.27"
15 Watt, DC 24 V	CR-USLL-24-D-15W	900 x 32 x 7 / 35.43" x 1.25" x 0.27"
20 Watt, DC 24V	CR-USLL-24-D-20W	1200 x 32 x 7 / 47.24" x 1.25" x 0.27"

### Technical Data


LED type	SMD2835, LM80 approved
Colour Temp (CCT)	6500 K
Luminous Efficiency	100 lm/watt
Beam Angle	120 Deg
CRI (min)	80
Storage Temperature	-20°C to +75°C
Operating Temperature	-10°C to +65°C
Protection class	IP 20
Service Life	50,000 Hrs. @ 25°C
Accessories	2 no's Clamps for Clamp Mounting, 0.5 Sq.mm 2 core Wire for Input Supply
Housing Material	PC + Aluminium

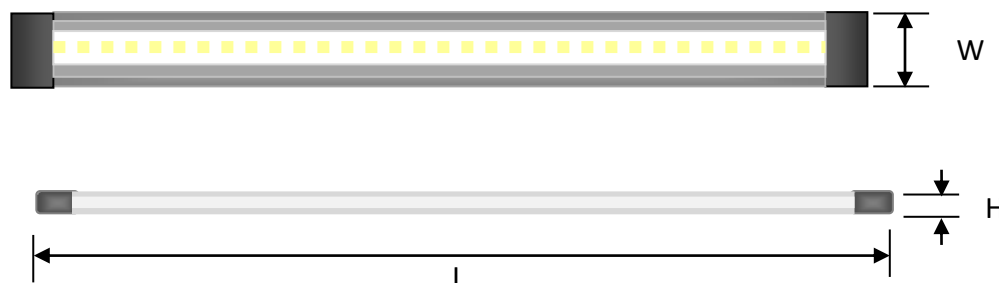


Steel Mounting Clamps

Information in the datasheet is subject to modification without prior notice

## LUX Diagram

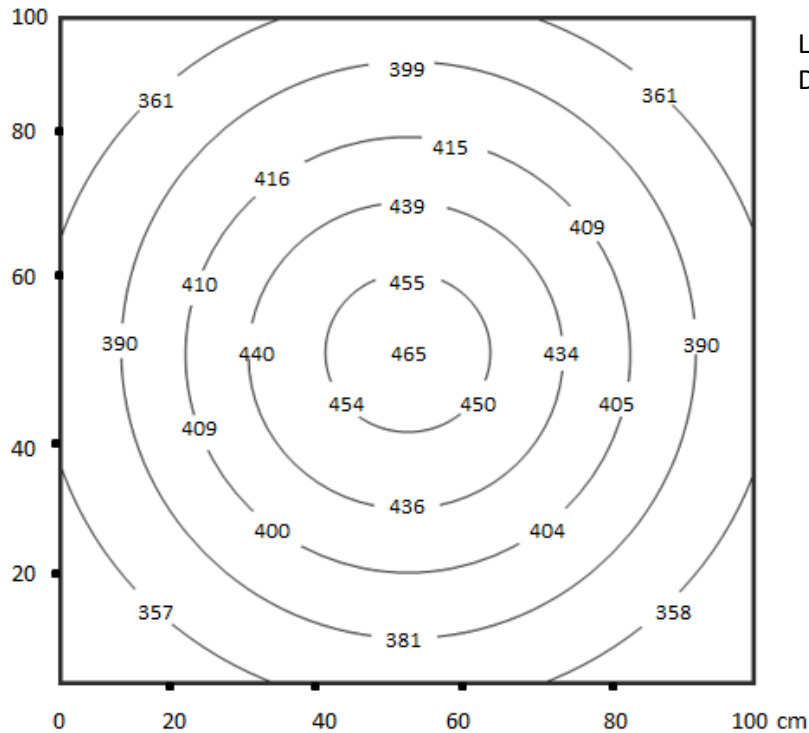

Lux diagram for 5W, 24 VDC, Transparent Diffuser, measured at 1 Mtr Height

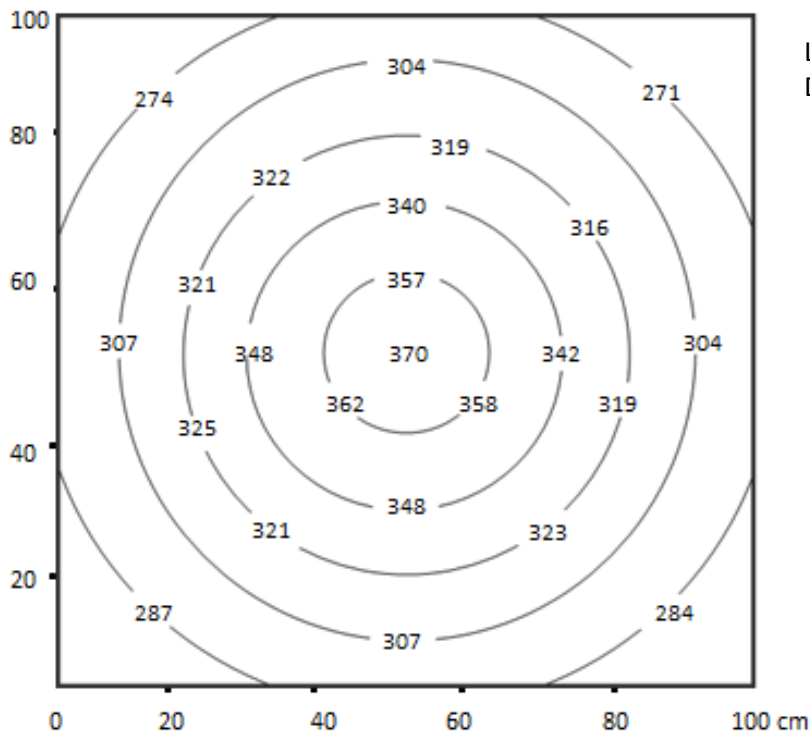

Lux diagram for 5W, 24 VDC, Milky White Diffuser, measured at 1 Mtr Height

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad,  
Nashik – 422010, INDIA

Email: [info@craftech.co.in](mailto:info@craftech.co.in)  
[www.craftech.co.in](http://www.craftech.co.in)