


CSL Series

Linear LED Light

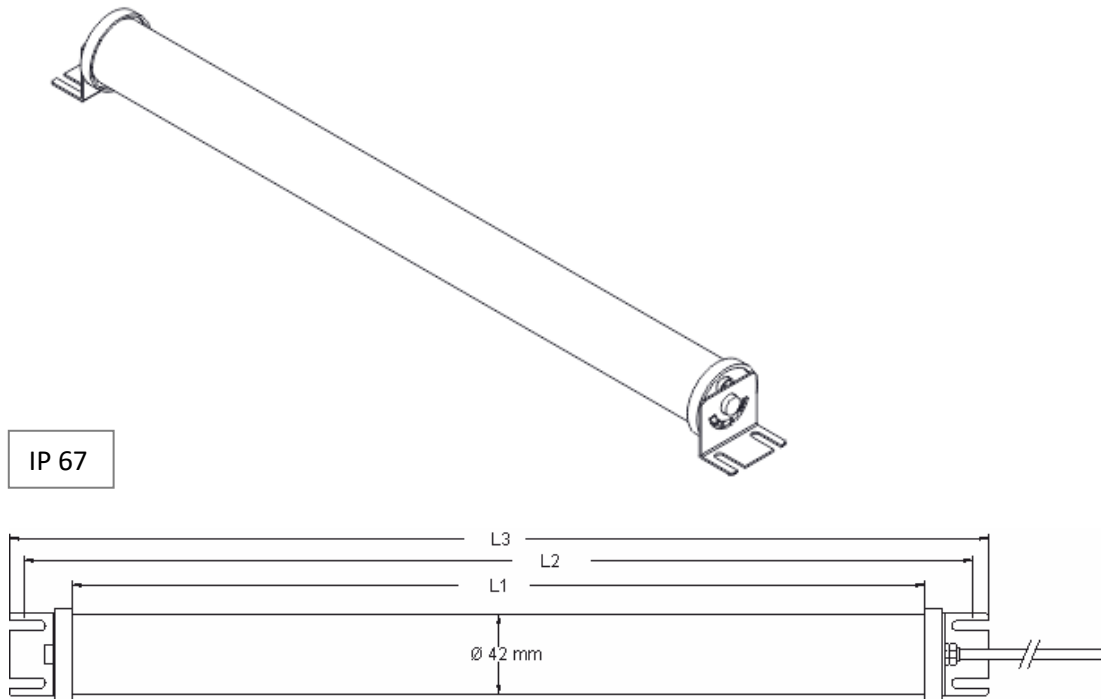


Product Dimension Drawing All dimensions in mm

Parameter Model / Part No	Input Operating Voltage	Wattage	L1	L2	L3
CR-CSL-230-A-24W	230 V AC	24W	610	665	690
CR-CSL-230-A-48W	230 V AC	48W	1200	1255	1280

Specification:

Enclosure	Polycarbonate, Thickness 1.5 mm
Diffuser	Polycarbonate LED Grade
LED Housing	Aluminium - Heat Sink Grade
LED Colour Temperature	Cool White 6500 K, CRI>80
Input Voltage	240 V AC
Protection class	IP 67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temp	-40 °C to +65 °C
Mounting	"L" Bracket with 160 Degree rotation freedom
Cable	2 Core wire, 0.5 Sq. mm, 1 Mtr Lengths,
Installation	Fixed by screws M5/M6



"L" Bracket with angle
setting arrangement

Features & Applications:

- Tough, Unbreakable, lightweight, shock proof & safe to install
- 50,000 hours and more of continuous operation
- Diffused light preventing glares & improving visibility
- Ideal for Walk-in Freezers & Coolers, Cold storages/warehouses, Food

Actual Light Photos

