

GMLL Series LED Luminaries



IP67




Key Features

Enclosure	Borosilicate glass 4.2mm Thick
LED Colour Temperature	6500 K, CRI>80
Input Voltage	24 VDC with Polarity & 240 VAC with External Adapter
Protection Grade	IP67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temp	-20 °C to +65 °C
Mounting	“L” Bracket with 180 Degree rotation freedom
Installation	Fixed by screws M5/M6
Input connection	Wire 0.5 Sq.mm, LAPP

GMLL Series LED Luminaries



Image for representation purpose

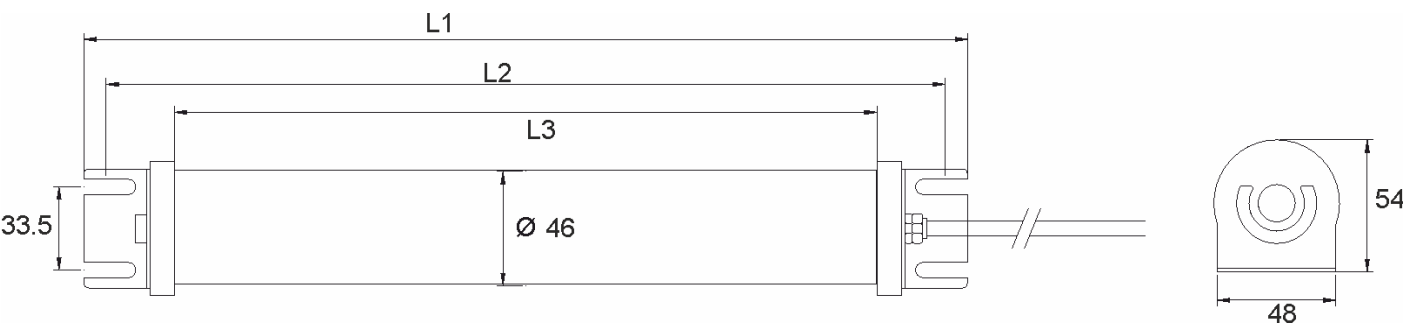

Sr.no	P/N	Input voltage/Wattage	Size L1(mm)	Size L2(mm)	Size L3(mm)
1	CR-GMLL-24-D-9W	24VDC, 9W	355	340	290
2	CR-GMLL-24-D-12W	24VDC, 12W	355	340	290
3	CR-GMLL-24-D-14W	24VDC, 14W	515	500	450
4	CR-GMLL-24-D-18W	24VDC, 18W	450	435	385
5	CR-GMLL-24-D-24W	24VDC, 24W	565	550	500
6	CR-GMLL-24-D-30W	24VDC, 30W	700	685	635
7	CR-GMLL-230-A-12W	230VAC, 12W	355	340	290
8	CR-GMLL-230-A-18W	230VAC, 18W	450	435	385
9	CR-GMLL-230-A-24W	230VAC, 24W	565	550	500
10	CR-GMLL-230-A-36W	230VAC, 36W	700	685	635