

CSL Series LED Luminaries




Features & Applications

- Tough, Unbreakable, lightweight, shock proof & safe to install
- 50,000 hours and more of continuous operation
- Diffused light preventing glares with uniform light distribution.
- Ideal for Walk-in Freezers & Coolers, Cold storages/warehouses, Food Processing plants & many more applications.

Key Specification

LED Housing	Aluminium - Heat Sink Grade
Light Diffuser	Polycarbonate LED Grade
Enclosure Material	Polycarbonate, Thickness 1.5 mm
LED Color Temperature	Cool White 6500 K, CRI>80
Input Voltage	240 V AC
Protection class	IP 67
Luminaire Light Yield	110-120 Lumens / Watt
Operating Temp	-40 °C to +55 °C
Mounting	"L" Bracket with 160 Degree rotation freedom
Cable	2 Core wire, 0.5 Sq. mm, 1 Mtr Lengths, LAPP
Installation	Fixed by screws M5/M6

Product Dimension Drawing

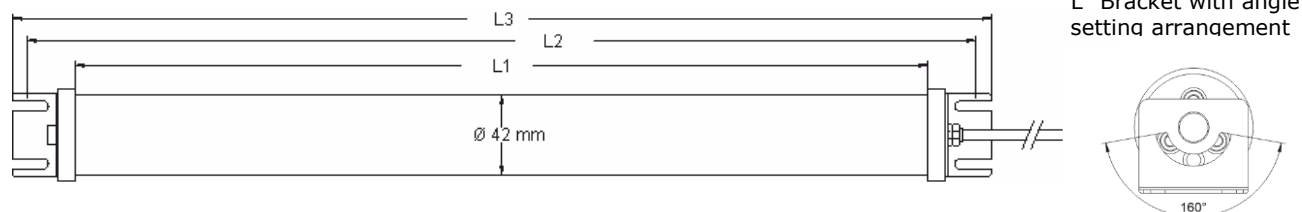

Product Specification

Model / Part No	Operating Voltage	Wattage	L1 (mm)	L2 (mm)	L3 (mm)
CR-CSL-230-A-24W	230 V AC	24W	610	665	690
CR-CSL-230-A-48W	230 V AC	48W	1200	1255	1280

Lights also available with 24 VDC supply, please contact us for customized requirement.

