

LMLL Series LED Luminaries



IP 65 CE

Craftech LED Machine Lights are compact, robust and efficient. It provides bright and uniform light distribution improving productivity and safety in operations. It is suitable for light as well as heavy industrial applications. It is constructed with heavy duty extruded aluminum and tempered glass with frosted surface finish to minimize glare on eyes. With estimated working life of more than 50,000 hours, that will provide 5 years of maintenance free operation.


Key Specifications

Light diffuser	PMMA for Diffused, PC for Clear
Housing material	Heavy Duty Extruded Anodized Aluminium Housing 6063 Grade
Mounting arrangement	“L” Clamp, rotatable mounting to change Light Focus angle
LED Type	LM 80 Approved, 2835 Package LED, 0.5 watts
LED Light Angle, Color, CRI	120 Deg, 6500K, >80
Luminaire Light Yield	110-120 Lumens / Watt
Insulation resistance at 500 VDC	1.3 X 10 ⁴ Mega - Ohm
Operating temperature	-20°C to +65°C
Operating Life	50,000 Hours
Standard Conformity, Degree of Protection	IEC 60947, IEC 60529, IEC 60068, IP65




The lights can be customized as to specific requirement


LMLL Series LED Luminaries

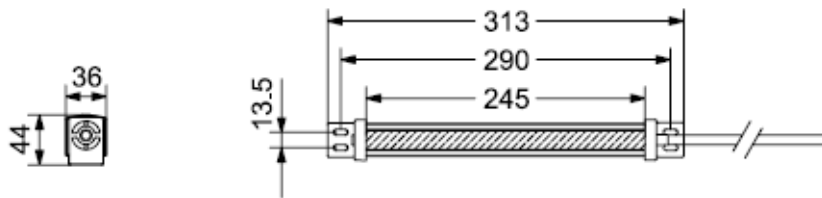


8 Watt 24 VDC
P/N: CR-LMLL-24-D-8W

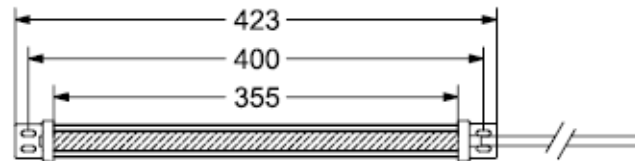

12 Watt 24 VDC
P/N: CR-LMLL-24-D-12W

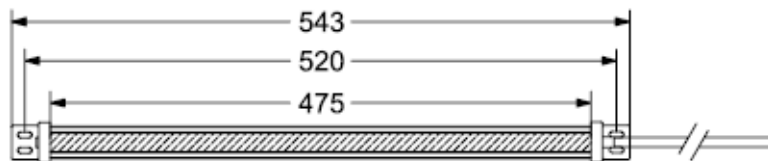

16 / 20 Watt 24 VDC
P/N: CR-LMLL-24-D-16W
P/N: CR-LMLL-24-D-20W

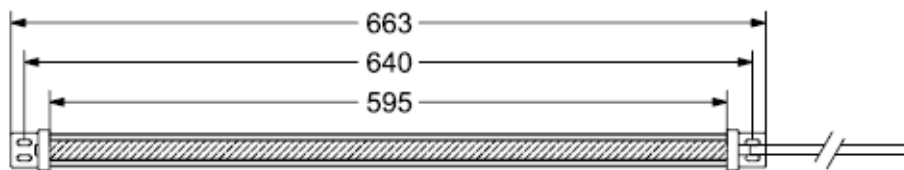

24 Watt 24 VDC
P/N: CR-LMLL-24-D-24W