

# GMLL Series LED Luminaries



IP67




## Key Features

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Enclosure              | Borosilicate glass 4.2mm Thick                       |
| LED Colour Temperature | 6500 K, CRI>80                                       |
| Beam Angle             | 120 Deg/30 Deg                                       |
| Input Voltage          | 24 VDC with Polarity & 240 VAC with External Adapter |
| Protection Grade       | IP67                                                 |
| Luminaire Light Yield  | 110-120 Lumens / Watt                                |
| Operating Temp         | -20 °C to +65 °C                                     |
| Mounting               | “L” Bracket with 180 Degree rotation freedom         |
| Installation           | Fixed by screws M5/M6                                |
| Input connection       | Wire 0.5 Sq.mm, LAPP                                 |

## GMLL Series LED Luminaries



Image for representation purpose

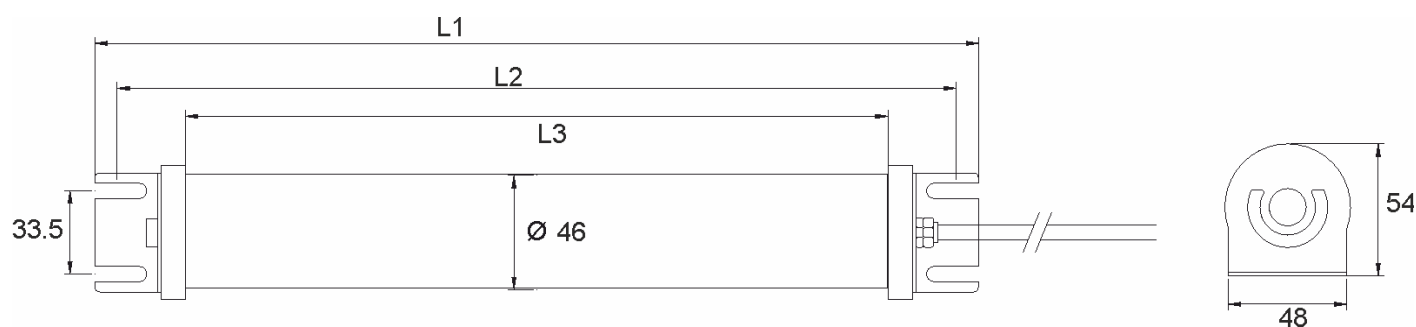

| Sr.no | P/N               | Input voltage/Wattage | Size L1(mm) | Size L2(mm) | Size L3(mm) |
|-------|-------------------|-----------------------|-------------|-------------|-------------|
| 1     | CR-GMLL-24-D-9W   | 24VDC, 9W             | 355         | 340         | 290         |
| 2     | CR-GMLL-24-D-12W  | 24VDC, 12W            | 355         | 340         | 290         |
| 3     | CR-GMLL-24-D-14W  | 24VDC, 14W            | 515         | 500         | 450         |
| 4     | CR-GMLL-24-D-18W  | 24VDC, 18W            | 450         | 435         | 385         |
| 5     | CR-GMLL-24-D-24W  | 24VDC, 24W            | 565         | 550         | 500         |
| 6     | CR-GMLL-24-D-30W  | 24VDC, 30W            | 700         | 685         | 635         |
| 7     | CR-GMLL-230-A-12W | 230VAC, 12W           | 355         | 340         | 290         |
| 8     | CR-GMLL-230-A-18W | 230VAC, 18W           | 450         | 435         | 385         |
| 9     | CR-GMLL-230-A-24W | 230VAC, 24W           | 565         | 550         | 500         |
| 10    | CR-GMLL-230-A-36W | 230VAC, 36W           | 700         | 685         | 635         |