


RTLL Series LED Light



The RTLL Linear Light are designed to meet the demanding nature of industrial lighting, build on heavy duty industrial grade Aluminium body. The light is suitable for various applications such as Warehouses, corridors, Industrial Sheds, Passages, stores areas, Inspection tables, work benches, Equipment/machine lighting and more.


Features

- Diffused Cool White Light for Strain less Working
- Powder coated aluminum body
- Sleek & Compact Design
- Longer Life of more 50000 Hours
- Quick and Easy to Install
- Available in 24 VDC and 230 VAC supply Voltage
- Ingress protection IP 20 and IP 67

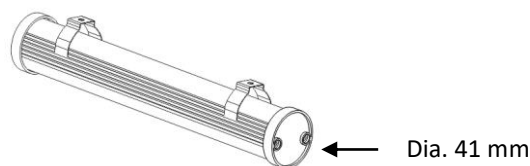

Information in the datasheet is subject to modification without prior notice, image provide is just for representation purpose

RTLL Series LED Light

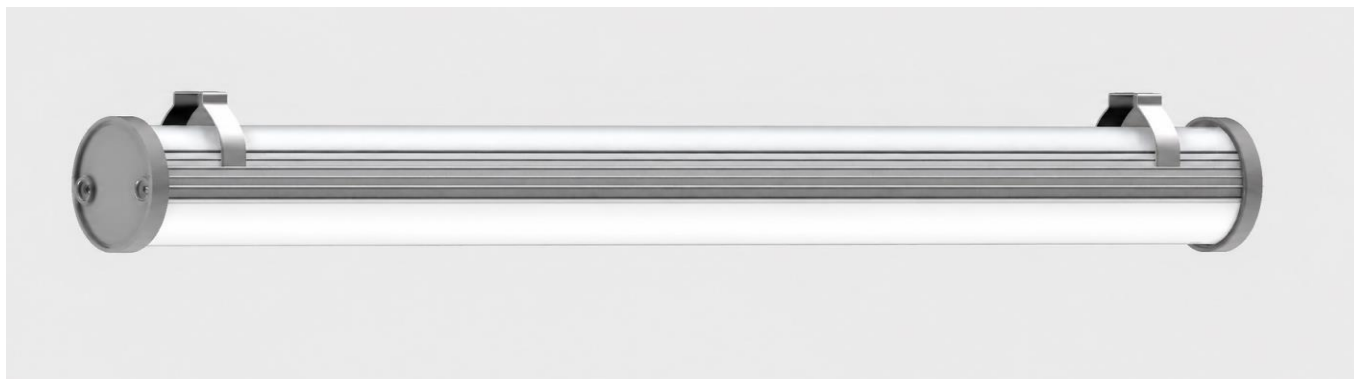

Technical Specifications

Parameters	Values
Input Voltage	230/240 VAC
Wattage	24 W in 2 Feet and 48 W in 4 Feet length
Luminous Efficiency	≥ 100 Lm/Watt
Beam Angle	120 deg
CRI	>80
LED type	SMD2835, LM 80 Approved
Color Temp (CCT)	6500K
Product Length (mm)	24W - 600 mm, 48W – 1200 mm
Protection	IP 20
Operating Temp	+10°C to +65°C
Service Life	>50,000 Hours @25°C
Accessories	2 no's Clamps for Mounting, Wire for Input Supply
Housing Material	6063 Grade Extruded Aluminium, PC Diffuser
Ordering code/Model / Part No	CR-RTLL-230-A-24W, CR-RTLL-230-A-48W

The Lights are also available in 24 VDC, wattage and length can be customized as per requirement.

Information in the datasheet is subject to modification without prior notice, image provide is just for representation purpose