

Short Arm LED Light



Features

- Aluminium housing for better LED Heat dissipation and long working life
- Nylon Swivel Joints, fastened with Steel plate
- 360 Degree of rotation freedom
- Bright & Focused Illumination for better visibility.
- Low power consumption

Product Key Specification


LED Colour Temperature	6500K (Cool White)
Light Beam Angle & CRI	30° LED Lens, CRI > 80
Input Voltage	24 V DC
Power Consumption	4.5W, 9W, 12W
Rated Current	220 mA, 375mA, 500 mA
Lumens Output	4.5W, 850 lx / 12W 3000 lx at 1 Mt Height +/- 5%
Housing	Aluminium Powder coated
Front	Toughened Glass/Polycarbonate
Cable Length	0.5 Sq. mm Two core wire with 2 Meter length
Protection Grade	IP 65 (Without ON/OFF Switch) IP 50 With ON/OFF switch
Operating Temperature	+10°C to +65°C
Installation	Fixed by screws M5 X 30mm supplied with Light

Model/Part no	Description
CR-FALL-S- 24-D-4.5W	24 VDC, 4.5 W Short Arm Light
CR-FALL-S- 24-D-9W	24 VDC, 9 W Short Arm Light
CR-FALL-S- 24-D-12W	24 VDC, 12 W Short Arm Light

Information in the datasheet is subject to modification without prior notice

Short Arm LED Light

Product Drawing 4.5W

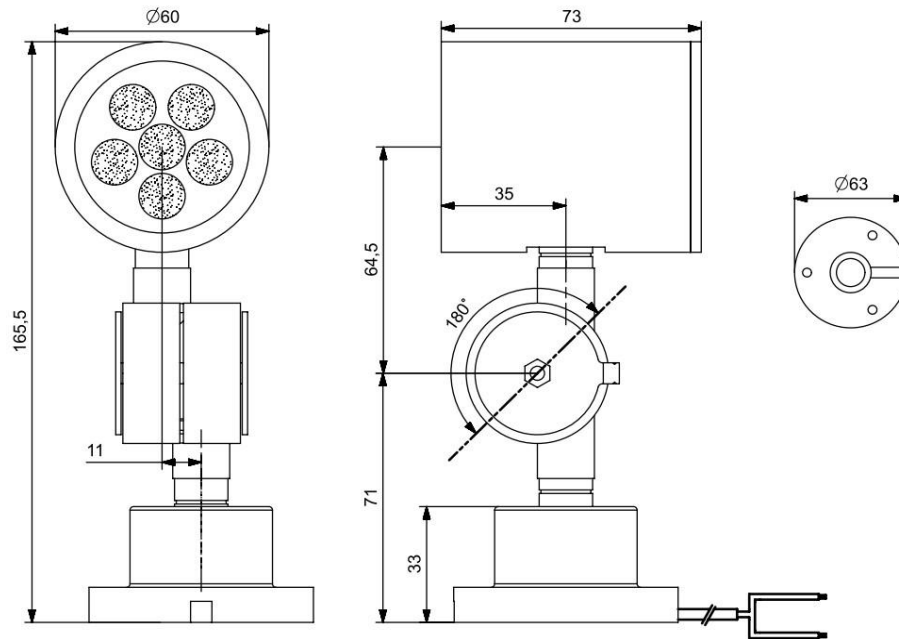

Front View

Side View

Information in the datasheet is subject to modification without prior notice

