

GNLL Series LED Light

Product Key Specification




LED Color Temperature	6500K (Cool White)
Light Beam Angle & CRI	30° LED Lens, CRI > 80
Input Voltage	24 VDC
Power Consumption	4.5W, 9W, 12 W
Rated Current	220mA, 375 mA, 500 mA
Lumens Output	4.5W – 850 lx & 12W- 3200 lx at 1 Mt Height (+/- 5%)
Housing	Aluminium Powder coated
Front	Toughened Glass/Polycarbonate
Cable Length	0.5 Sq. mm Two core wire with 2 Meter length
Protection Grade	IP 65 (Without ON/OFF Switch) IP 50 With ON/OFF switch
Operating Temperature	+10°C to +65°C
Installation	Fixed by screws M5 X 30mm supplied with Light

Model / Part No	Description
CR-GNLL-24-D-XX-4.5W	Goose Neck light 4.5W, 24VDC
CR-GNLL-24-D-XX-9W	Goose Neck light 9W, 24VDC
CR-GNLL-24-D-XX-12W	Goose Neck light 12W, 24VDC
	<i>XX- 12 (For 12-inch goose neck) XX-18 (For 18-inch goose neck) XX- 24 (For 24-inch Goose neck)</i>



GNLL Series LED Light

Technical Datasheet


Product Drawing 9W/12W

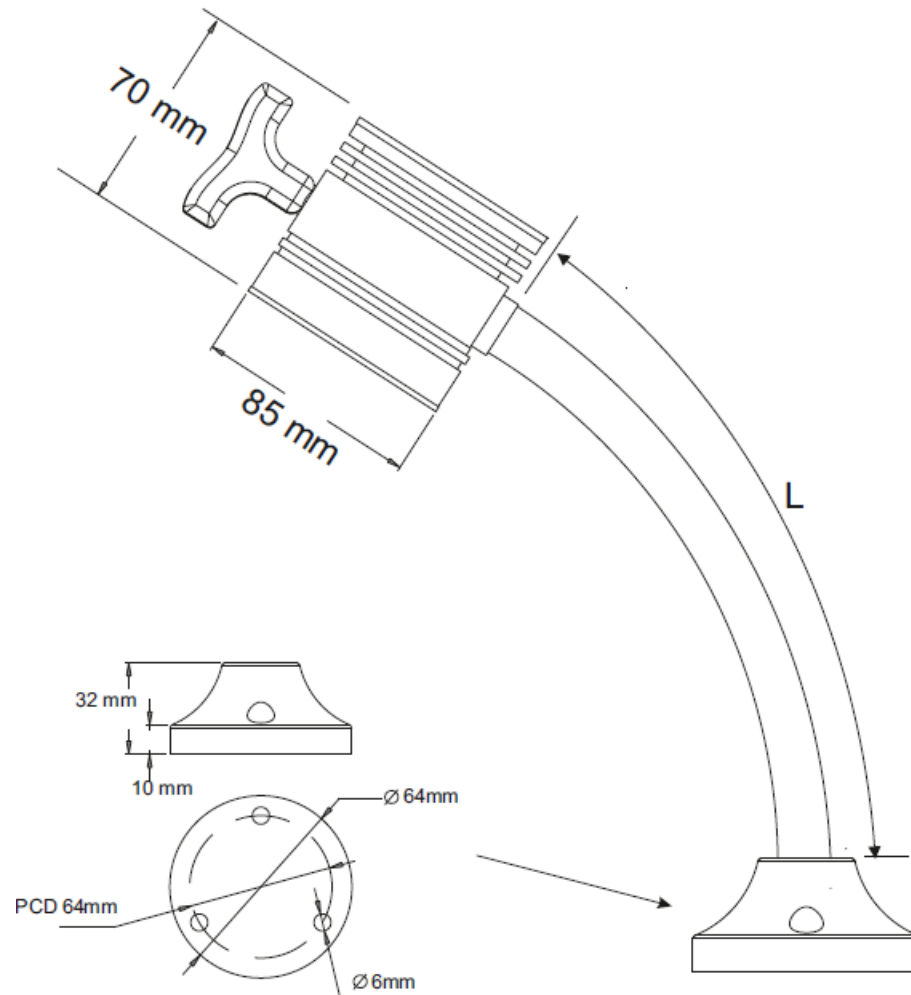

"L" Bracket for wall mounting

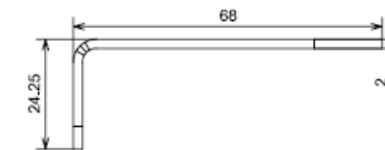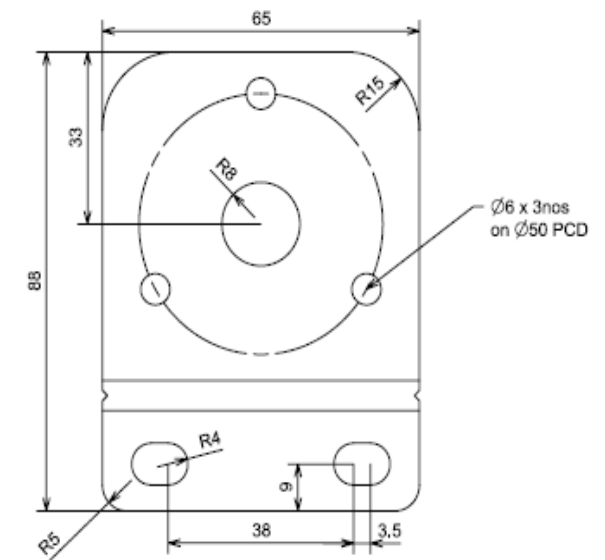


SIDE VIEW
BEND PROFILE




GNLL Series LED Light

Technical Datasheet

Product Drawing 4.5 W

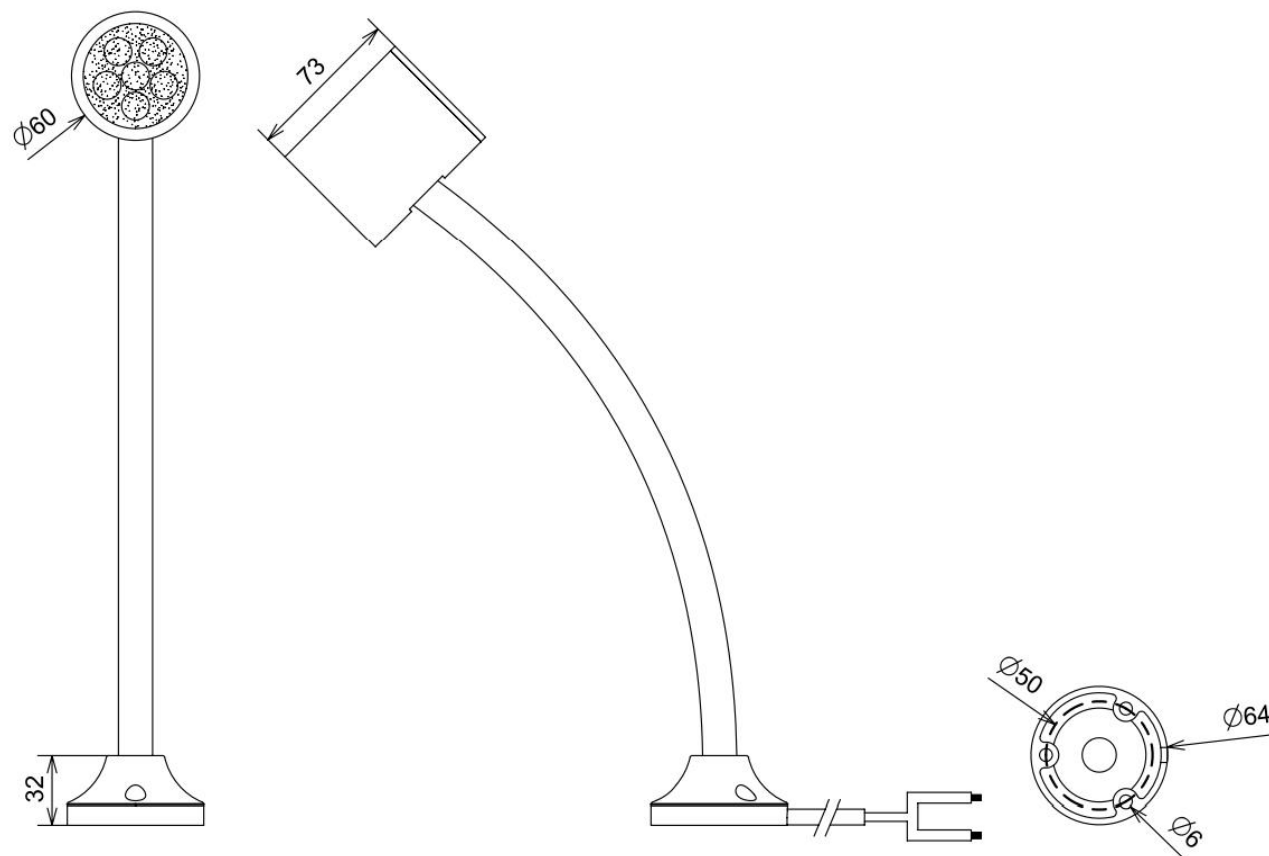

"L" Bracket for wall mounting

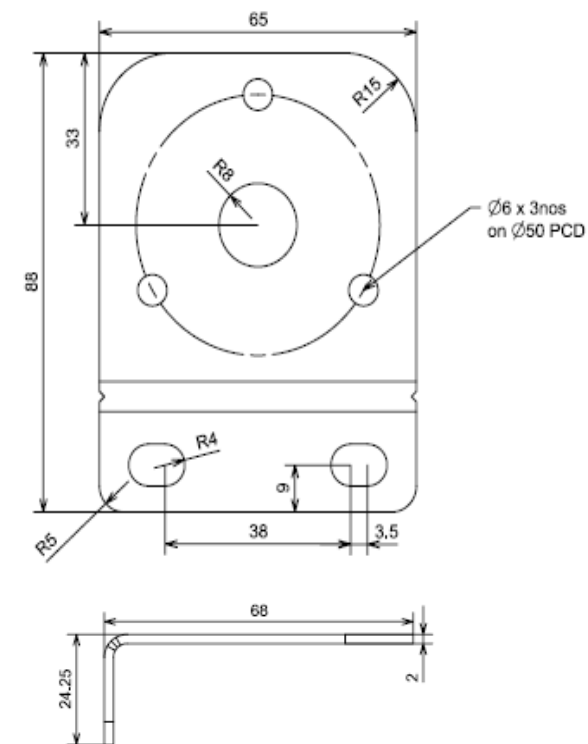

SIDE VIEW
BEND PROFILE

